


Product Identification

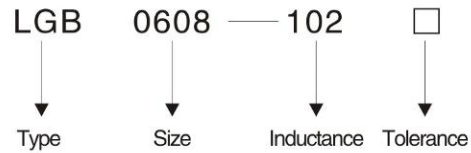


APPLICATIONS

- a) Electronic ballast, Energy-saving lamps.
- b) Television & Audio appliances.
- c) UPS、EMC filter.

FEATURES&APPLICATIONS

- a) High power, small size, saving installation space.
- b) Small distributed capacitance high resonance frequency.
- c) Using PVC or UL heat-shrinkable tubing for protection.

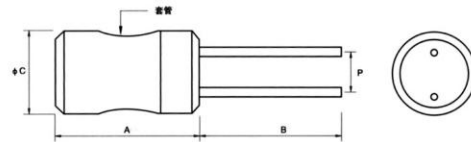

Dimensions(mm)

Part No.	DIMENSIONS(mm)			
	Amax	Bmax	Cmax	P
LGB0304	5.0	5.0	4.0	1.5±0.5
LGB0406	7.0	5.0	5.0	2.0±1.0
LGB0507	8.5	5.0	6.0	2.5±1.0
LGB0608	9.5	5.0	7.0	3.0±1.0
LGB0709	10.5	5.0	8.0	4.5±1.0
LGB0810	11.5	5.0	9.0	5.0±1.0
LGB0912	13.5	5.0	11.5	6.0±1.0
LGB1012	13.5	5.0	12.5	6.0±1.0
LGB1016	18.5	5.0	12.5	6.0±1.0

Electrical Characteristics

Part No.	Inductance	IDC
LGB0304	1 μ H~27mH	1A~30mA
LGB0406	1 μ H~10mH	1.8A~28mA
LGB0507	1 μ H~33mH	3.6A~15mA
LGB0608	1 μ H~47mH	3.7A~22mA
LGB0709	1 μ H~47mH	3.6A~24mA
LGB0810	5 μ H~100mH	3.4A~20mA
LGB0912	10 μ H~100mH	4.3A~25mA
LGB1012	33 μ H~150mH	2A~16mA
LGB1016	51 μ H~200mH	2.4A~18mA